


## Arduino

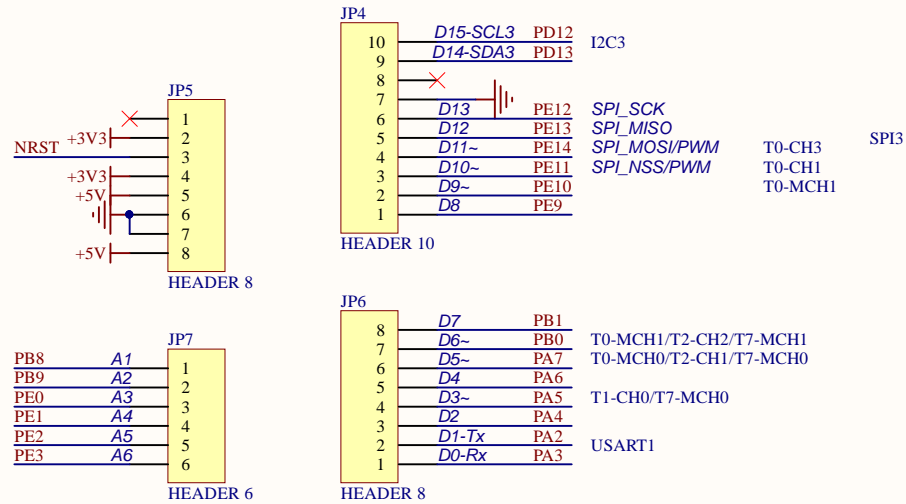

Company Name: GigaDevice


File Name: Arduino

Revision: 1.0


Date: 2023-2

Author: yihao.wu





## LED

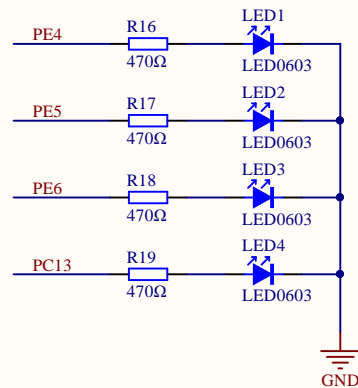

## KEY



## Extension Pin

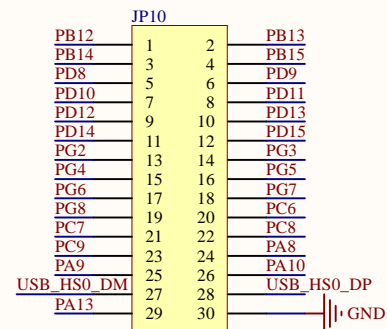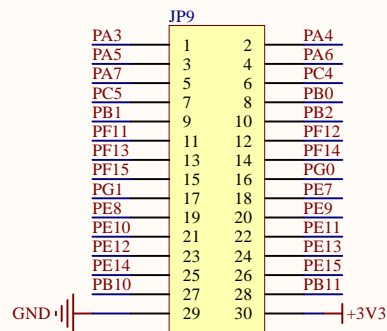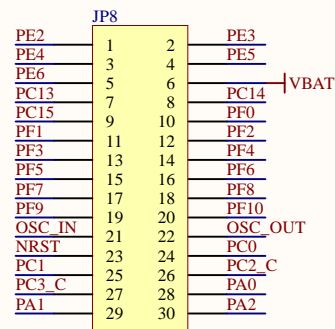







Company Name: GigaDevice

File Name: Extension

Revision: 1.0

Data: 2023-2

Author: yihao.wu

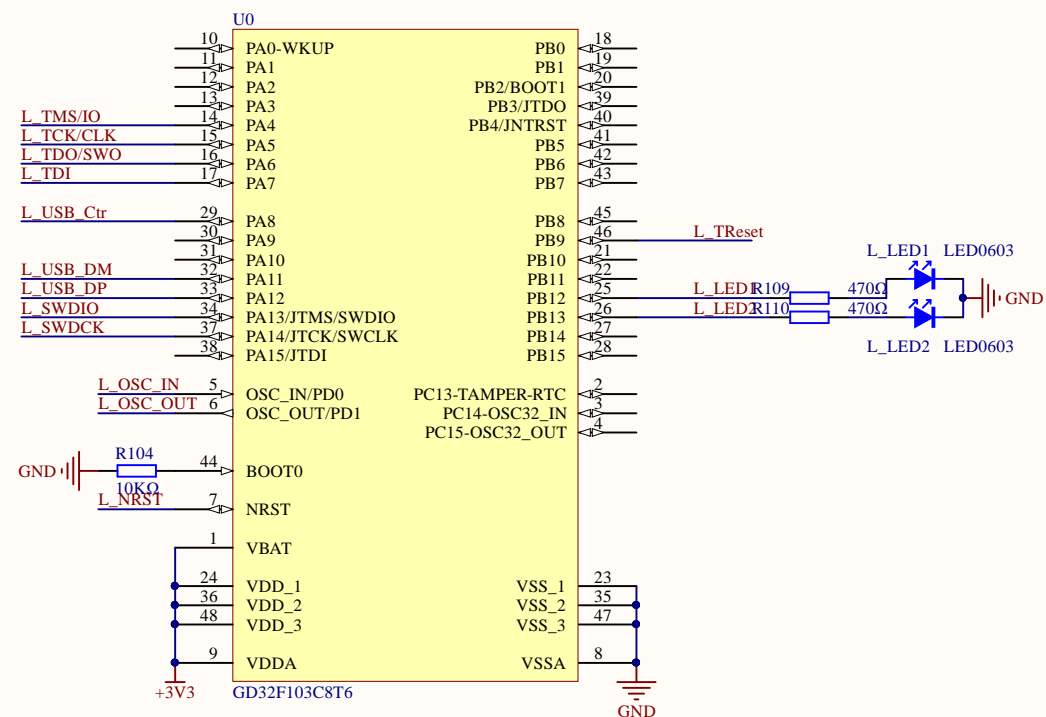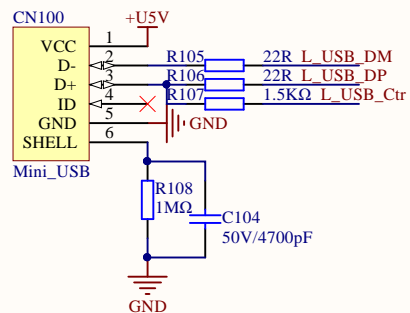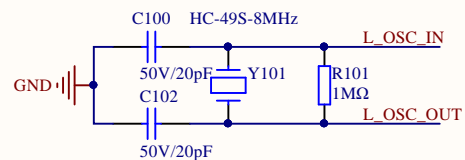


Company Name: GigaDevice


File Name: GDLink

Revision: 1.0

Data: 2022-3

Author: XuFei

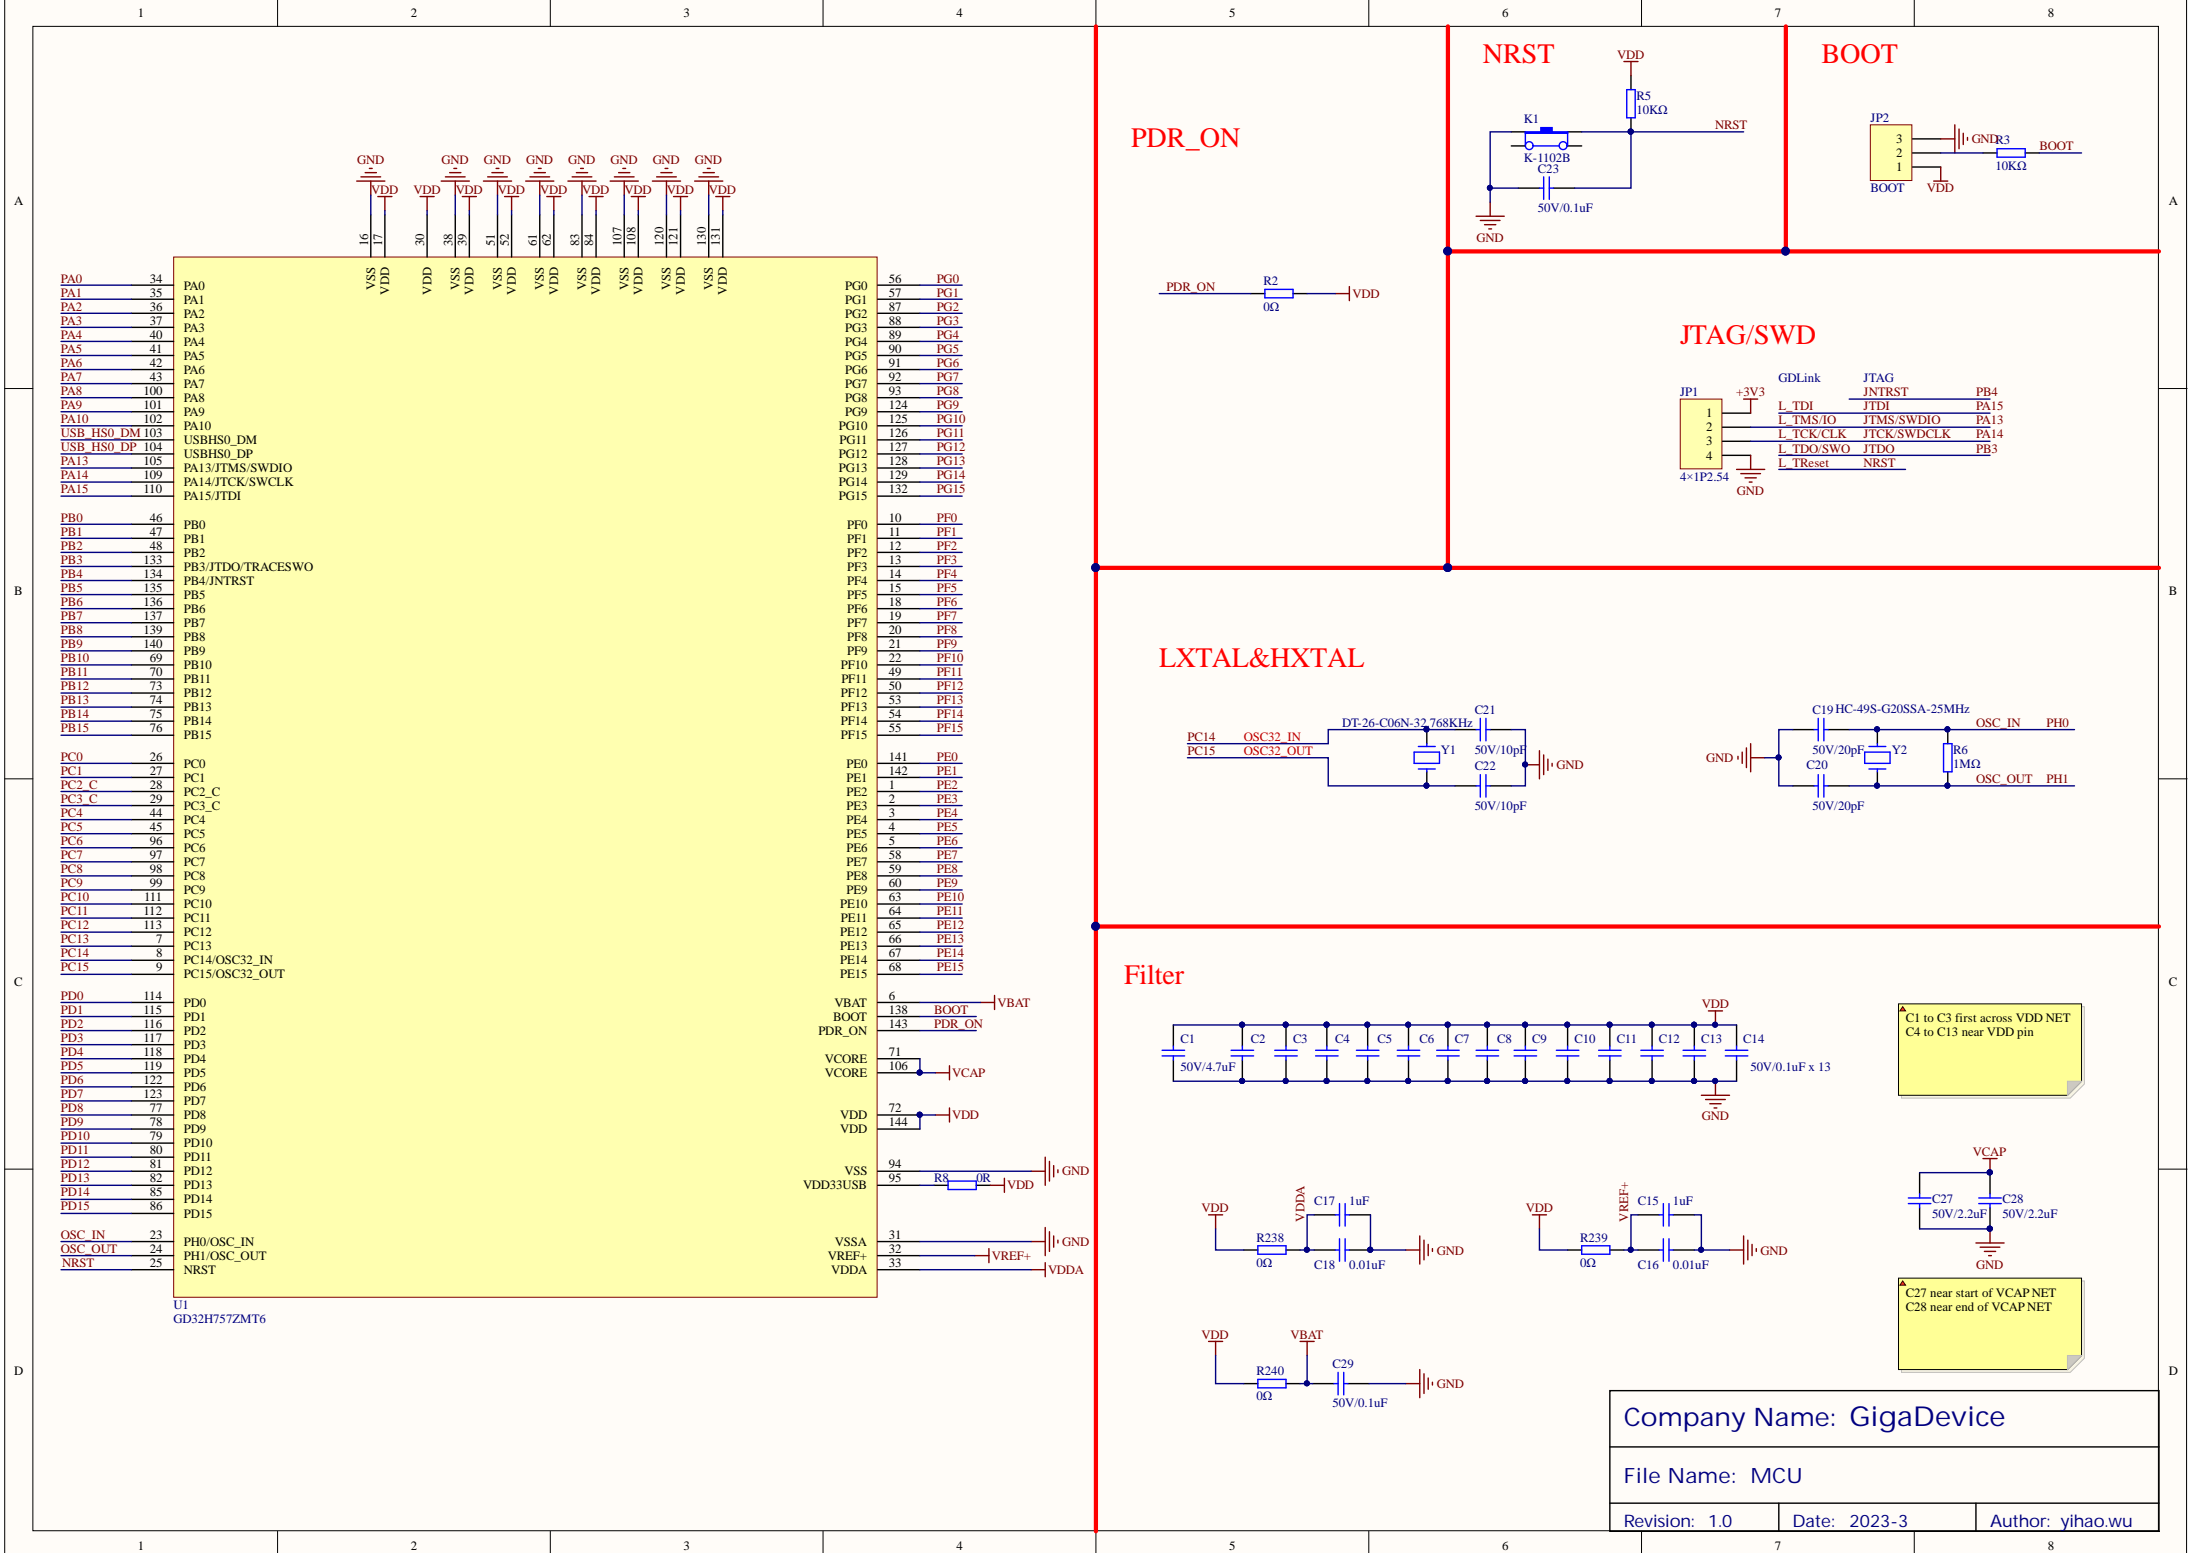

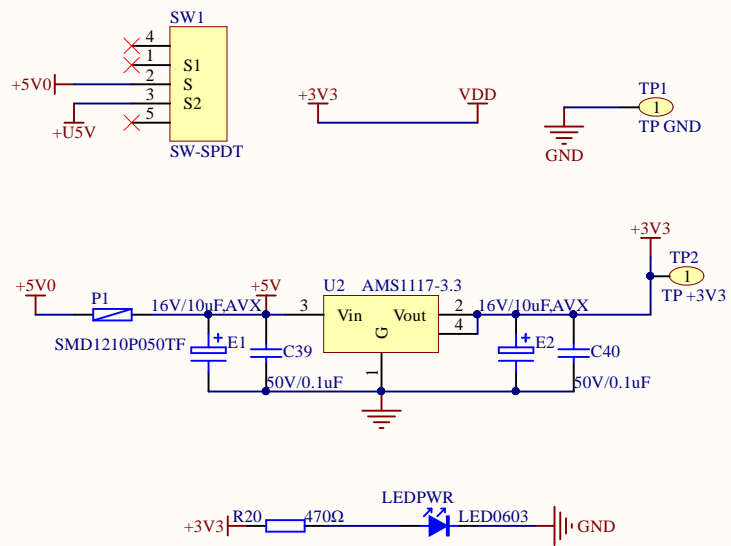

Company Name: GigaDevice


File Name: Power

Revision: 1.0

Data: 2023-2

Author: yihao.wu

## USART0 To USB

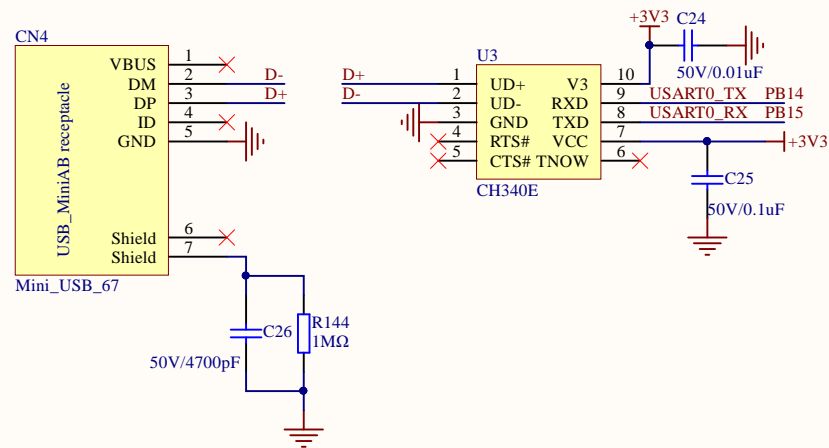



Company Name: GigaDevice

File Name: USART

Revision: 1.0

Data: 2023-2

Author: yihao.wu

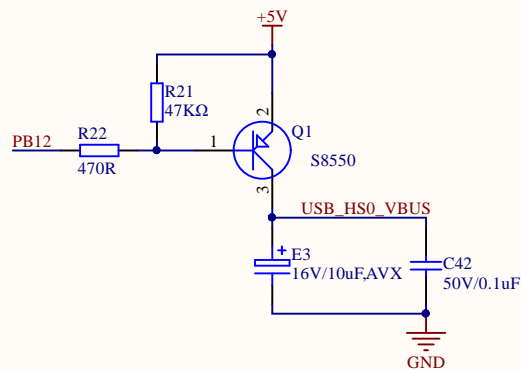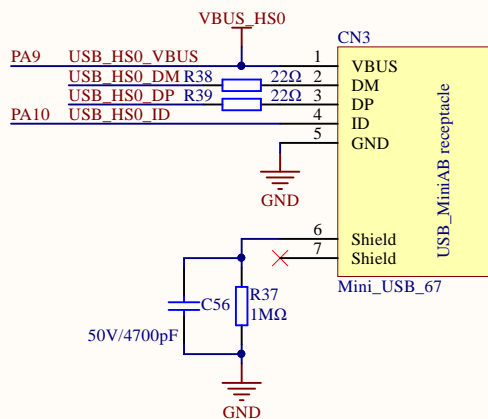

VBUS enable while PB12 with LOW level.

Company Name: GigaDevice		
File Name: USB		
Revision: 1.0	Data: 2023-2	Author: yihao.wu

