



Arduino

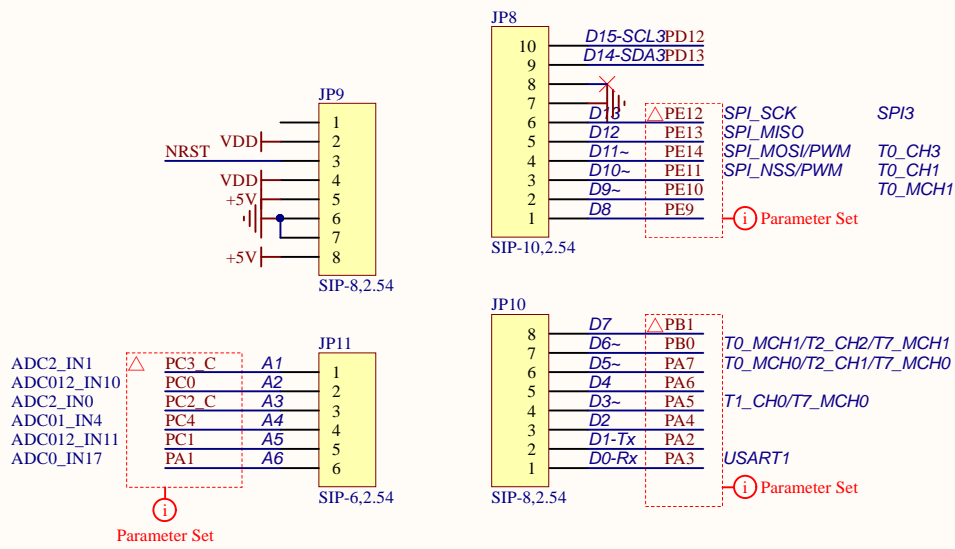


Company Name: GigaDevice		
File Name: Arduino		
Revision: 1.4	Date: 2024-12	Author: BOYA.JIANG





LED

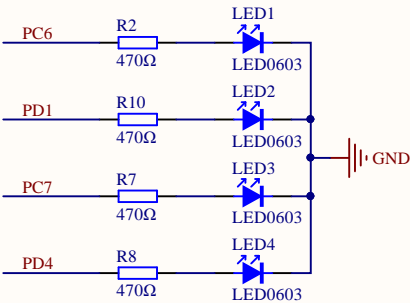

KEY



Extension Pin

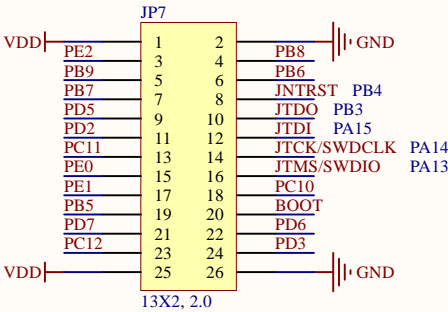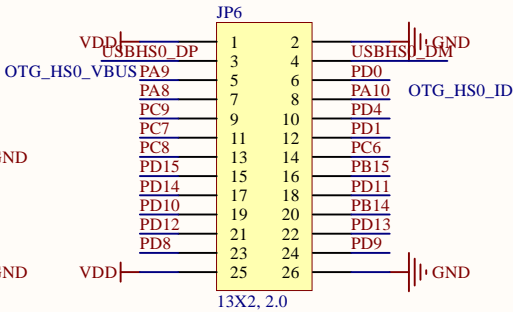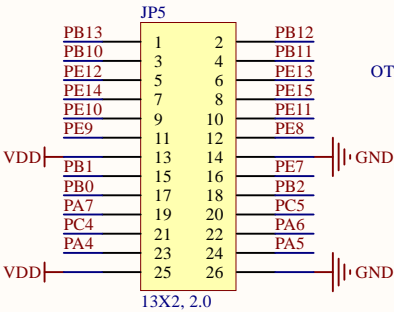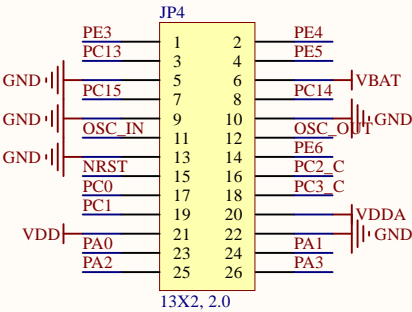

Company Name: GigaDevice

File Name: Extension

Revision: 1.4

Date: 2024-12

Author: BOYA.JIANG

1

2

3

4

A

A

B






B

C

C

D

D

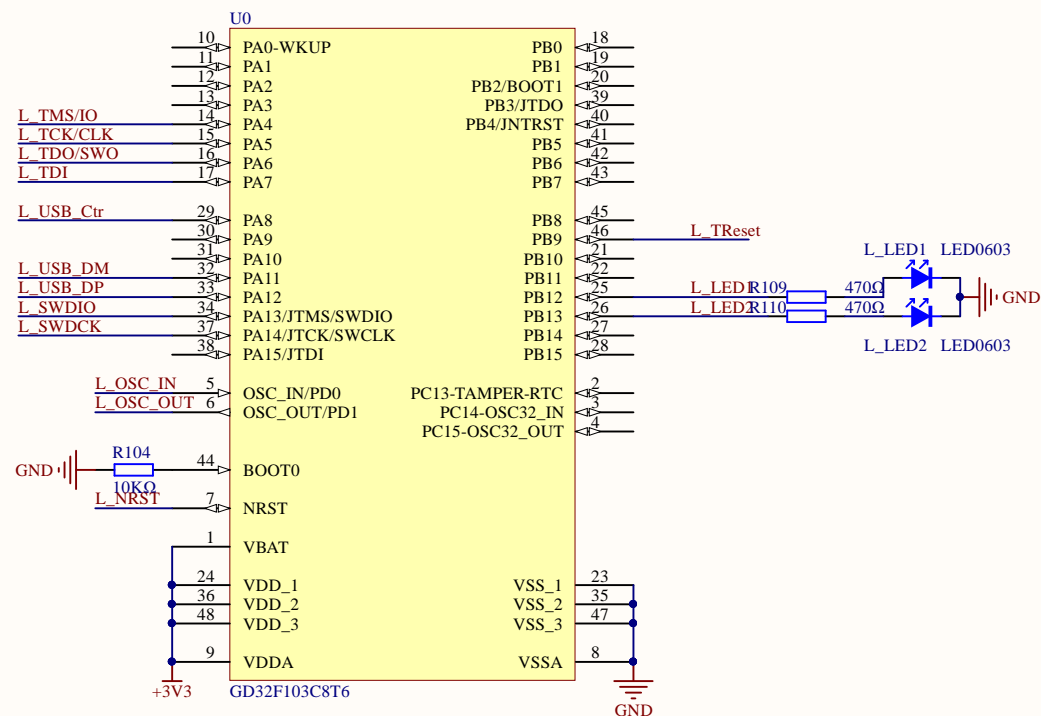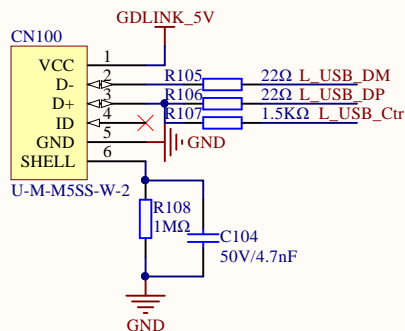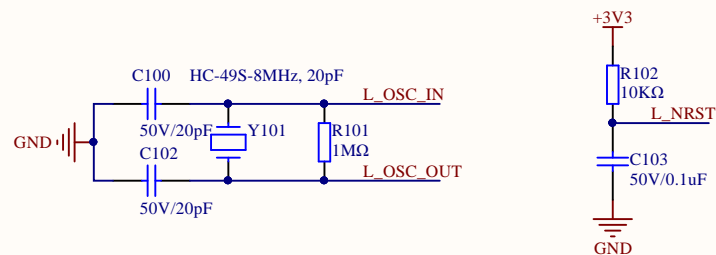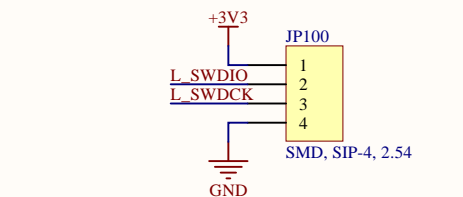

Company Name: GigaDevice

File Name: GDLink

Revision: 1.4

Date: 2024-12





Author: boyajiang

1

2

3

4

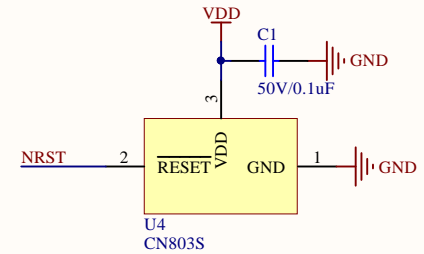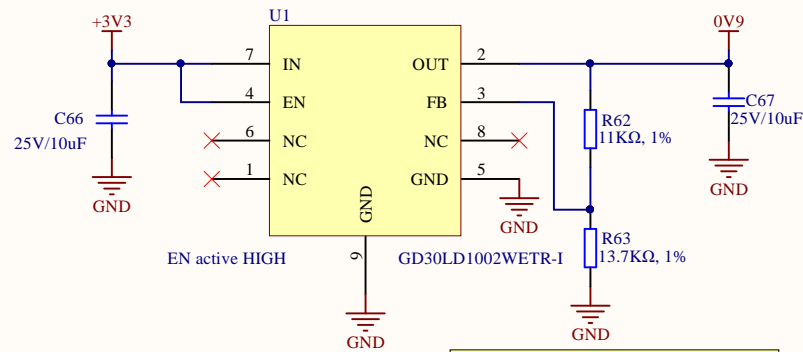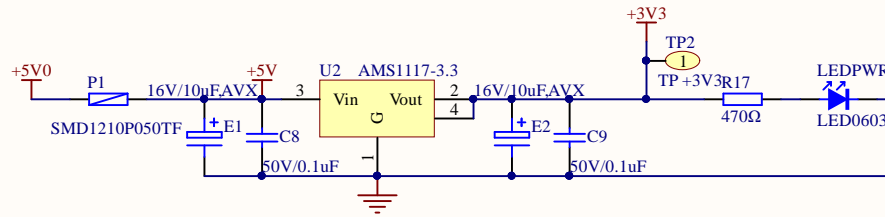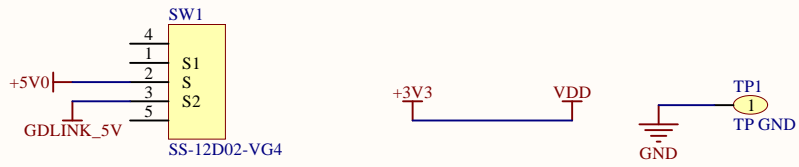

注意:复位芯片需要选用开漏型

▲反馈电阻R62、R63应至少为1%精度

Company Name: GigaDevice


File Name: Power

Revision: 1.4

Date: 2024-12

Author: BOYA.JIANG

USART0 To USB

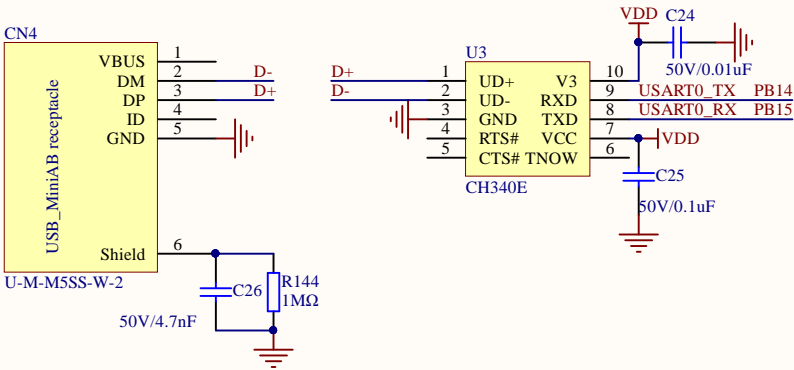

Company Name: GigaDevice

File Name: USART

Revision: 1.4

Date: 2024-12

Author: BOYA.JIANG

